


U 192 D Dekoderschaltkreis

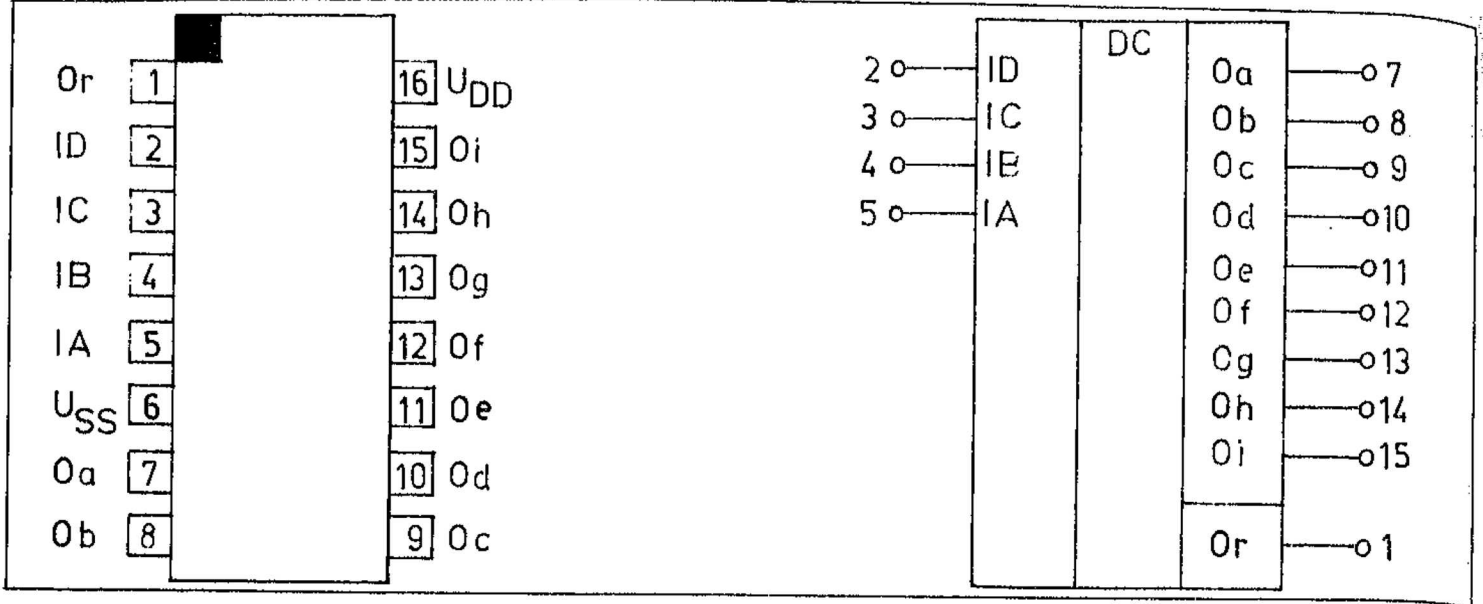

Anschlußbelegung und Schaltzeichen

Bauform: DIP-16, Plast (Bild 4)

Typstandard: TGL 42662

D	C	B	A	Oa	Ob	Oc	Od	Oe	Of	Og	Oh	Oi	Or	Display
L	L	L	L	L	H	H	L	L	L	L	L	L	H	1
L	L	L	H	H	H	L	H	H	L	H	L	L	H	2
L	L	H	L	H	H	H	H	L	L	H	L	L	H	3
L	L	H	H	L	H	H	L	L	H	H	L	L	H	4
L	H	L	L	H	L	H	H	L	H	H	L	L	H	5
L	H	L	H	H	L	H	H	H	H	H	L	L	H	6
L	H	H	L	H	H	H	L	L	L	L	L	L	H	7
L	H	H	H	H	H	H	H	H	H	H	L	L	H	8
H	L	L	L	H	H	H	H	L	H	H	L	L	H	9
H	L	L	H	H	H	H	H	H	H	L	H	H	H	10
H	L	H	L	L	H	H	L	L	L	L	H	H	H	11
H	L	H	H	H	H	L	H	H	L	H	H	H	H	12
H	H	L	L	H	H	H	H	L	L	H	H	H	H	13
H	H	L	H	L	H	H	L	L	H	H	H	H	H	14
H	H	H	L	H	L	H	H	L	H	H	H	H	H	15
H	H	H	H	H	L	H	H	H	H	H	H	H	H	16

Ausgewählte Kennwerte

Kennwerte	Kurzzeichen	Meßbedingung	min.	max.	Einheit
Betriebsspannung	U_{DD}		10,8	15	V
Ausgangsspannung	U_O		0	U_{DD}	V
Ausgangsstrom H	$ I_{OH} $			10	mA

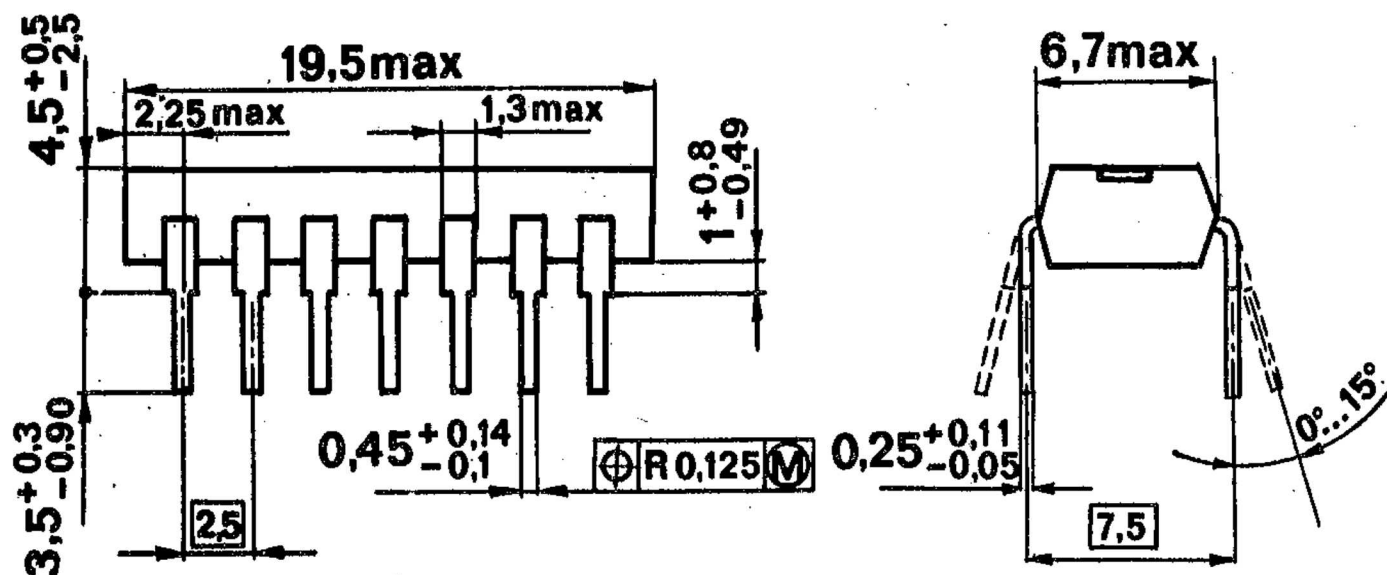


Bild 3 (DIP-14, Plast)

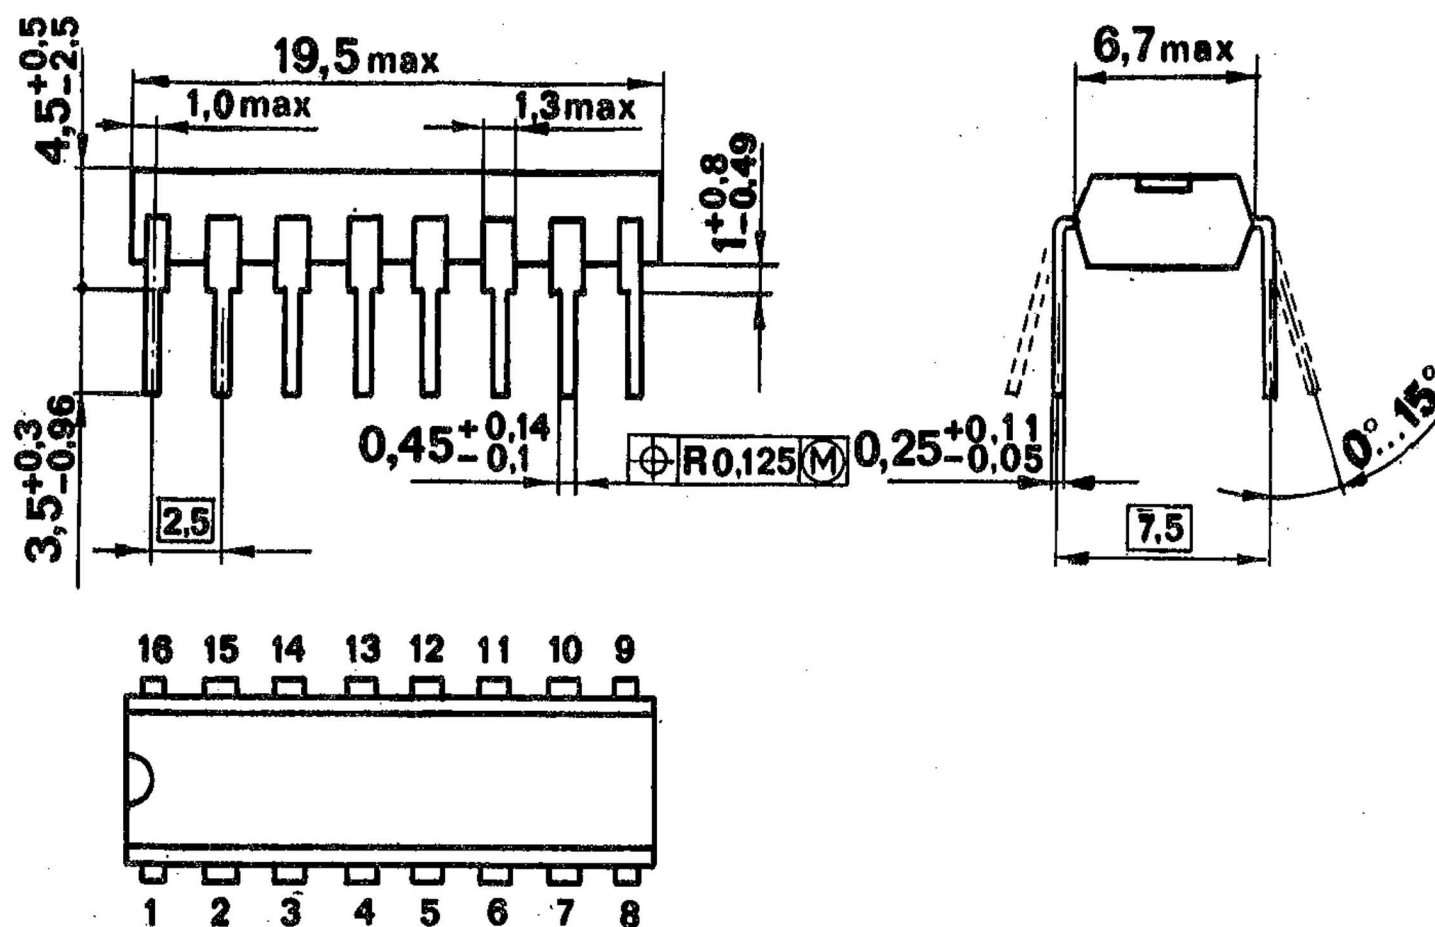


Bild 4 (DIP-16, Plast)